



HAWK®



BRAND FOR

the best tile adhesives

Upgrade Your Tiling Experience
With Our Premium Tile Adhesive Solutions





About us

HAWK stands as a prominent provider of construction chemical solutions within India's industry landscape. As an ISO 45001:2018 certified company, **HAWK** has garnered a reputation for excellence. Distinguished as one of the fastest-growing Indian enterprises in the realm of construction chemicals, **HAWK** proudly carries the banner of its brand, '**HAWK**'. Our diverse spectrum of construction chemical offerings includes epoxy and grout formulations, adhesives, admixtures, sealants, and various products designed for versatile applications such as grout installation, tile fixation, waterproofing, and more.

Vision

"Empowering Industries And Communities With Innovative, Sustainable, And Safe Chemical Solutions For A Better Future."



HAWK®



Upgrade Your Tiling Experience
With Our Premium Tile Adhesive Solutions

TILE ADHESIVE | EPOXY GROUT | TILE GROUT



FIXING UP EVERYTHING

GRADE : HG 111 C1
Tiles Adhesive

USE FOR IT :
Flooring

NET WEIGHT 20 KG

Do Not Add Extra
Cement Or Sand With The Adhesive

PROPERTIES	RESULTS
Appearance	Free Flow Powder
Colour	Grey
Pot Life	45 min.
Open Time	30 min.
Adjustability Time	45 min.
Trafficable Time	24 Hours
Shear Adhesion (as per annex B) Dry Condition	1.0 N/mm ²
Tensile Adhesion (as per annex A) Dry Condition	0.50 N/mm ²
EN 12004 Standard	CT

Product Details

HG 111 C1, high polymer modified, cement-based tile adhesive, suitable for fixing tiles & natural stones & Vitrified tiles in interior and exterior situations. applications in difficult and demanding situations consult Antique regarding use of a higher performance adhesive.

Self Life & storage

Shelf life is 12 months from the date of manufacturing in unopened condition. Store in a cool & dry place.

Coverage

This will depend on the nature and lateness of the surface and the method of application, but at 3mm thickness it is approx. 55-60 sq. ft. per 20kg bag when using a thin-bed trowel. For good coverage, it is vitally important that all surfaces should be clean, smooth, plumb, level



FIXING UP EVERYTHING

GRADE : HG 222 C1 TE
Tiles Adhesive

USE FOR IT :
Wall tiles Outdoor & Indoor

NET WEIGHT 20 KG
Do Not Add Extra
Cement Or Sand With The Adhesive

PROPERTIES

RESULTS

Appearance	Free Flow Powder
Colour	Grey
Pot Life	45 min.
Open Time	30 min.
Adjustability Time	45 min.
Trafficable Time	24 Hours
Shear Adhesion (as per annex B) Dry Condition	1.25 N/mm ²
Tensile Adhesion (as per annex A) Dry Condition	1.0 N/mm ²
EN 12004 Standard	C1TE

Product Details

HG 222 C1 TE, high polymer modified, cement-based tile adhesive, suitable for fixing tiles & natural stones & Vitrified tiles in interior and exterior situations. applications in difficult and demanding situations consult Antique regarding use of a higher performance adhesive.

Self Life & storage

Shelf life is 12 months from the date of manufacturing in unopened condition. Store in a cool & dry place.

Coverage

This will depend on the nature and lateness of the surface and the method of application, but at 3mm thickness it is approx. 55-60 sq. ft. per 20kg bag when using a thin-bed trowel. For good coverage, it is vitally important that all surfaces should be clean, smooth, plumb, level



FIXING UP EVERYTHING

GRADE : HG 333 C2 T
Tiles Adhesive

USE FOR IT :

600x600mm | 600x1200mm
800x800mm | 800x1600mm
1200x1200mm | 1200x1800mm

NET WEIGHT 20 KG

Do Not Add Extra
Cement Or Sand With The Adhesive

PROPERTIES

RESULTS

Appearance	Free Flow Powder
Colour	Grey & White
Pot Life	45 min.
Open Time	30 min.
Adjustability Time	45 min.
Trafficable Time	24 Hours
Shear Adhesion (as per annex B) Dry Condition	1.5 N/mm ²
Tensile Adhesion (as per annex A) Dry Condition	1.5 N/mm ²
EN 12004 Standard	C2T

Product Details

HG 333 C2 T, high polymer modified, cement-based tile adhesive, suitable for fixing tiles & natural stones & Vitrified tiles in interior and exterior situations. applications in difficult and demanding situations consult Antique regarding use of a higher performance adhesive.

Self Life & storage

Shelf life is 12 months from the date of manufacturing in unopened condition. Store in a cool & dry place.

Coverage

This will depend on the nature and lateness of the surface and the method of application, but at 3mm thickness it is approx. 55-60 sq. ft. per 20kg bag when using a thin-bed trowel. For good coverage, it is vitally important that all surfaces should be clean, smooth, plumb, level



FIXING UP EVERYTHING

GRADE : HG 444 C2 TE
Tiles Adhesive

USE FOR IT :
Granite, Marble & Big Slab

NET WEIGHT 20 KG
Do Not Add Extra
Cement Or Sand With The Adhesive

PROPERTIES

RESULTS

Appearance	Free Flow Powder
Colour	Grey & White
Pot Life	45 min.
Open Time	30 min.
Adjustability Time	45 min.
Trafficable Time	24 Hours
Shear Adhesion (as per annex B) Dry Condition	1.5 N/mm ²
Tensile Adhesion (as per annex A) Dry Condition	1.5 N/mm ²
EN 12004 Standard	C2TE

Product Details

HG 444 C2 TE, high polymer modified, cement-based tile adhesive, suitable for fixing tiles & natural stones & Vitrified tiles in interior and exterior situations. applications in difficult and demanding situations consult Antique regarding use of a higher performance adhesive.

Self Life & storage

Shelf life is 12 months from the date of manufacturing in unopened condition. Store in a cool & dry place.

Coverage

This will depend on the nature and lateness of the surface and the method of application, but at 3mm thickness it is approx. 55-60 sq. ft. per 20kg bag when using a thin-bed trowel. For good coverage, it is vitally important that all surfaces should be clean, smooth, plumb, level





EPOXY GROUT

STAIN FREE GROUT FOR FLOOR & WALL

STAIN FREE GROUT FOR FLOOR & WALL



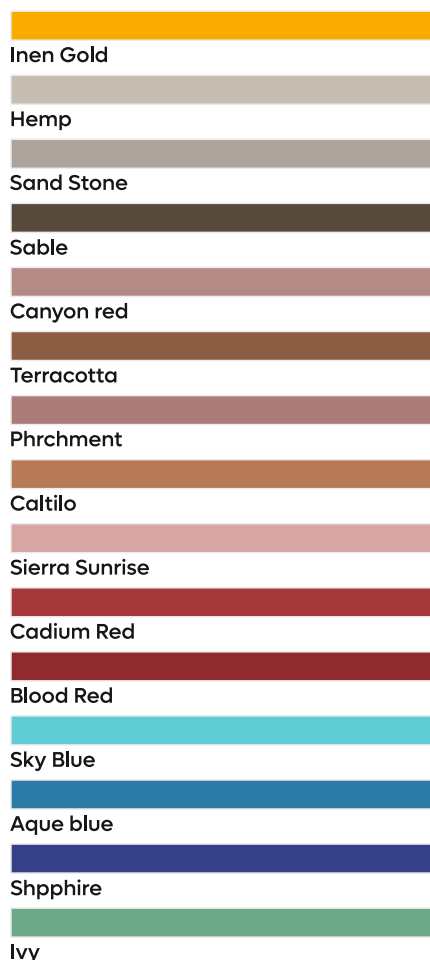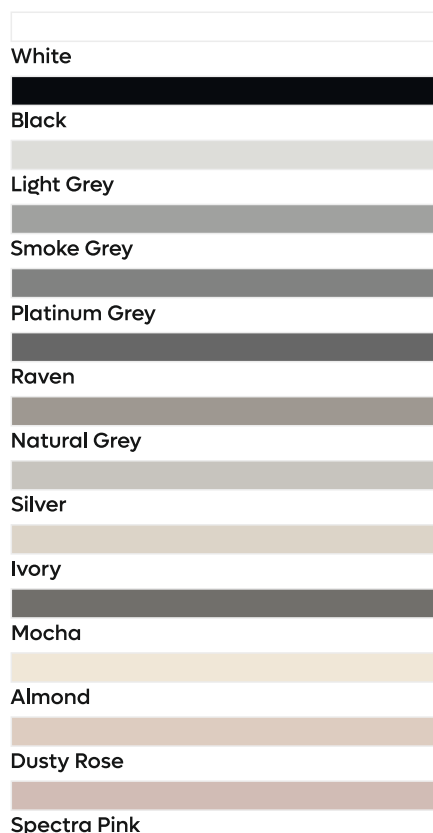

Pack Size:

	1 Kg.	5 Kg.
Resin	0.2 Kg.	1 Kg.
Hardner	0.08 Kg.	0.4 Kg.
Coated	0.720 Kg.	3.6 Kg.

Shelf Life: 1 year in dry unopened bags.

Applications:

Residences, Kitchens, bathrooms, swimming pools, fountains, hospitals, restaurants, showroom, industrial areas & high traffic areas.

Advantages:

- ▶ Water Resistant
- ▶ Stain free grout for floors & walls.
- ▶ Available in range of colors.
- ▶ Chemical & Bacterial resistant.
- ▶ Enhances look of walls & floors.
- ▶ Easy to apply-Smooth & Creamy.
- ▶ Easy to clean.
- ▶ Uniform color resist blotching.


PREMIUM EPOXY GROUT

Product Description:


Hawk is a Stain free Epoxy grout for floors & Walls. It is a color fast, water & chemical resistant & 100 % solid epoxy grout suitable for Ceramic tiles, Vitrified tiles, marbles and stones, especially in stain prone areas such as kitchens and bathrooms (residential & commercial installations). It is non shrinking, fast curing efflorescence free grout. It is ideal for installation where high strength mildew joints are required. It can be steam cleaned and is ideal for green buildings. Available in 1Kg and 5kg pack.

Features :

- ▶ Simply mix Hardener, resin & filler.
- ▶ Excellent under high temperature conditions.
- ▶ Beautiful Joints as no effect of pigments.
- ▶ Protection against Stains.
- ▶ Time Saving.
- ▶ Suitable for joints between 2-12 mm.
- ▶ Available in 20 colors.



White



Silver




Nat Grey



Smoke Grey



Black



Pink




Terracotta



R.Brown



Jesacmer



Ivory Grout



S.Blue



So.Blue



O.Green



RECOMMENDED FOR

- Ceramic floor & wall tile
- Quarry tile
- Marble
- MosaicsStone
- Pavers
- Slate
- Porcelain tile / Vitrified tile

ADVANTAGES

- Stain free
- Colour fast
- Easy to install and clean
- Water cleanable when fresh
- Non-cracking or powdering
- Anti-bacterial and ant-fungal
- Chemical and temperature resistant
- Available in range of 50 colours

STAINFREE GROUTS

HAWK Grout is a 100% solid epoxy grout that is stainfree, colour-fast chemical resistant for use with ceramic & vitrified tiles, marble and stone.

HAWK Grout is highly chemical resistant epoxy grout formulated for use with industrial tile, ceramic tile, vitrified tile, pavers, floor bricks & stone.

PRODUCT DETAILS

Hygienic, hard-wearing, impervious, epoxide resin-based grout with a high degree of resistance to chemical attack, abrasion and impact. The cured grout does not transfer taints to foodstuffs, does not permit the entry of bacteria or dirt and is easily main-tained in sterile condition.

NOTE

- 1.HAWK Grout are available in range of 13 colours.
- 2.HAWK Sparkle are available in range of all colours.

- TILE ADHESIVE
- EPOXY GROUT
- TILE GROUT



HAWK®

Customer Care :
+91 99250 44009

